

INSTALLATION INSTRUCTIONS

FT8000SM Surface Mount Bracket Installation Instructions

Component / Configuration Reference

MODEL NUMBER

Guardian PKSM; Guardian TNSM

GUIDE LEVEL

Component / Configuration

DOCUMENT STATUS


Customer Reference Copy

Helpful Installation Note

This guide is provided for information and planning purposes. Product designs and installation requirements may change over time. Before beginning installation, please review the instructions included with your product and confirm that you are using the most current product-specific instructions. If there is any difference, follow the current instructions supplied with the product.

Need help confirming the correct guide? Contact Rubber Mulch Outlet.

FT8000SM Surface Mount Bracket Installation Instructions

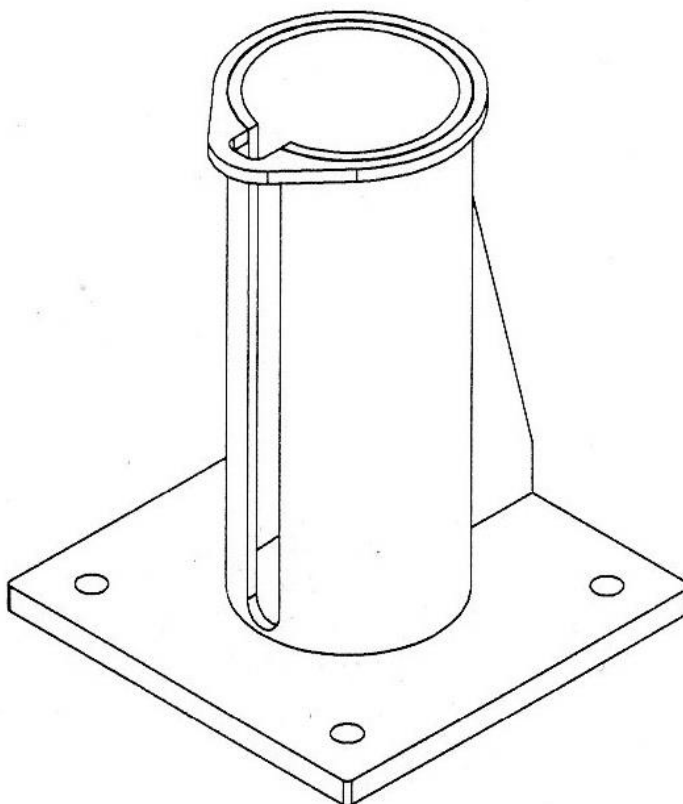

NOTE: DUE TO UNCERTAIN TYPE AND THICKNESS OF PLAYING SURFACE, ANCHOR HARDWARE IS NOT PROVIDED. FOR STANDARD INSTALLATIONS ON CONCRETE PLAYING SURFACES AT LEAST 6" THICK, FIRST TEAM RECOMMENDS $\frac{1}{2}$ "x 5 $\frac{1}{2}$ " EXPANSION ANCHORS AVAILABLE AT ANY BUILDERS SUPPLY CENTER.

1. Unbox each FT8000SM Surface Mount Bracket and position it on the playing surface centering the vertical tube portion of the bracket exactly where you want the post to be located. Refer to the installation instructions included with your posts for post locations.

2. Be sure to position Surface Mount Bracket with slotted cut out facing toward center of court.

3. DOUBLE CHECK YOUR POSITIONING OF THE SURFACE ANCHOR(S)!!! Once you are certain the Surface Mount Bracket(s) are properly located and positioned, Use the holes in the baseplate as a guide to carefully mark the four mounting hole locations on your playing surface to indicate the exact location to drill for connection.

4. Using the instructions included with your anchors, drill a hole at each of the four mounting locations for each Surface Mount Bracket. Drill bit size and depth of hole will be determined by the choice of anchor you use. NOTE: The baseplate holes are large enough to allow use up to ½" diameter anchors. If larger anchors are required, you will need to enlarge the holes in the baseplate.

5. Once all holes are drilled, be sure to clean out any dust from the hole before inserting the anchors.

6. Secure Surface Mount Bracket(s) to playing surface using the anchors you purchased.

7. Once Surface Mount Bracket(s) are securely fastened to the playing surface, insert post (Tennis, Pickleball or other) into the Surface Mount Bracket and follow the instructions include with your posts to complete the setup.